


# PUMP SPECIFICATIONS

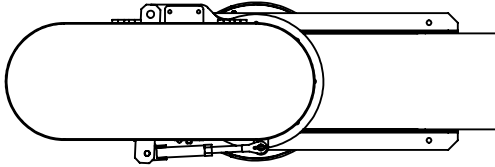

	MODEL	
	10-8	14-11
TUBE DIAMETER	10 in.	14 in.
IMPELLOR DIAMETER	8 in.	11.25 in.

PUMP LENGTH ..... UP TO 17'6"

CUSTOM BUILT IN 6" INCREMENTS

## BEARINGS:

TOP THRUST .... GREASABLE BALL BEARING

SHAFT ..... WATER LUBRICATED BRONZE

BOTTOM ..... WATER LUBRICATED BRONZE

SHAFT ..... STAINLESS STEEL


STATOR & LINER ..... STAINLESS STEEL

IMPELLOR ..... STAINLESS STEEL

MAIN HOUSING ..... PAINTED STEEL

VANE-TRASH GUARD ... PAINTED STEEL

DRIVE SYSTEM ..... STANDARD V-BELTS

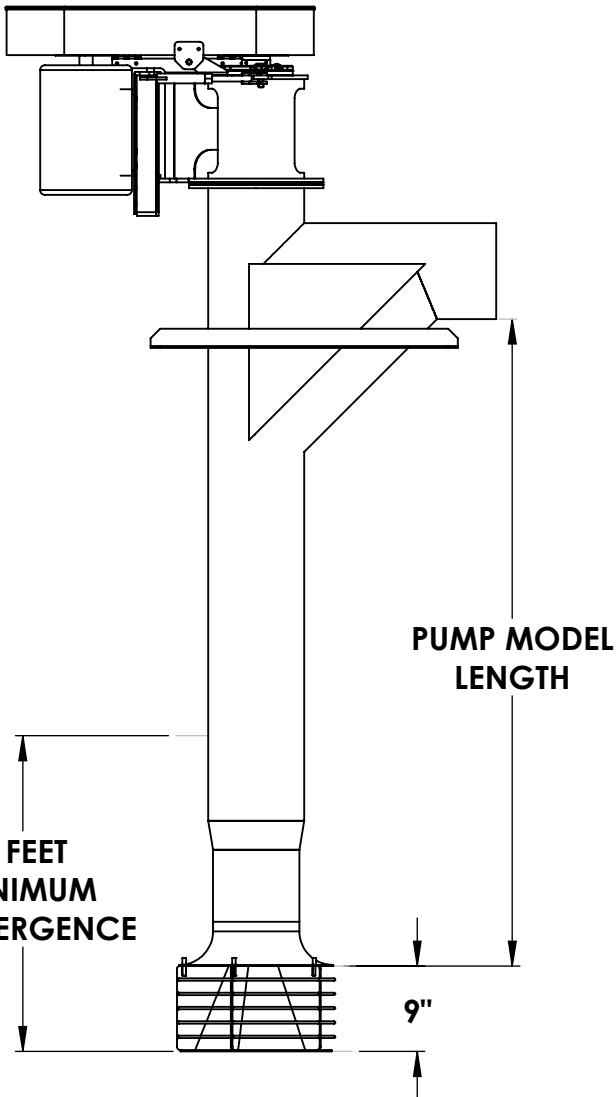

## FLOW RATES AT A GLANCE IN GPM

MODEL 10-8		
HP	@ 8' LIFT	@ 12' LIFT
7.5	800	400
10	1750	1050
12.5	2000	1500
15	2250	1950

MODEL 14-11		
HP	@ 8' LIFT	@ 12' LIFT
15	2800	1600
20	3800	2600
25	4400	3600
30	5000	4200
40	6000	5200